

Smart Desktop Terminal

SUNMI D3 PRO New

Your essential desktop to grow business.

Powered by
SUNMI OS

Compatible with
SUNMI DMP

 Google
Mobile
Services

Minimalist and durable, as all 3rd Gen SUNMI Terminals.

With its sleek aluminum body housing a 15.6" thin-bezel FHD screen, D3 PRO provides a tidy cable management solution with intentionally streamlined stand and base. This design not only ensures durability but also adds a touch of style, consistent with all 3rd generation products.

More powerful, not just in performance.

D3 PRO, coming with a Qualcomm platform, 4GB RAM + 64GB ROM memory, and fingerprint login for SUNMI One ID service, definitely will offer you improved user experience.

SUNMI OS 4.0

born for business, better in experience.

Enjoy one-touch convenience with integrated account and touch ID. Deploy remotely and launch immediately.



Extendable modules designed for your growing business.



15.6" thin-bezel
FHD screen

Cables
Concealed



Qualcomm platform



10" customer display
(Option with NFC ,Tap on
Glass to support SoftPOS) .





Plug-and-play,
no assembly required.



Connect a secondary display with a USB cable and offer the best interaction experience to your customers.



SUNMI D3 PRO Application Scenario

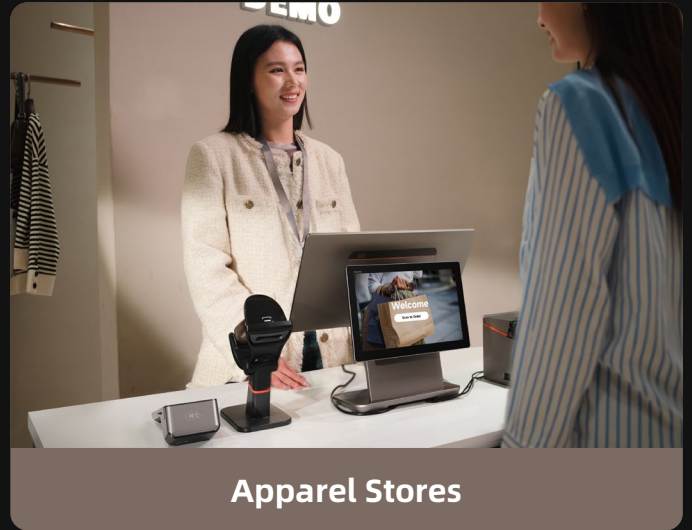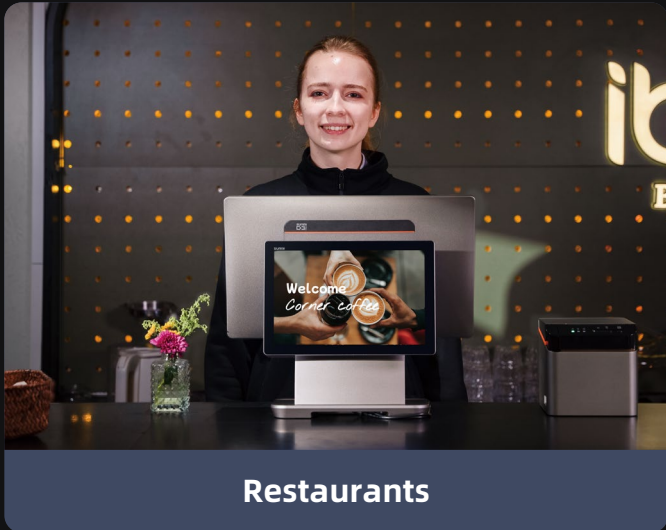

SUNMI D3 PRO Tech Specs

General Configuration

Product Model F3510	OS SUNMI OS (based on Android 13)	Processor Qualcomm hexa-core, up to 2.4GHz	Memory 4GB RAM+64GB ROM	Display 15.6" FHD 1920*1080, 10-point capacitive touch screen
Speaker 1*3W	Network LAN 1000M	Wi-Fi 2.4GHz & 5GHz IEEE 802.11 a/b/g/n/ac supported	Bluetooth BT 5.0 BLE supported	Button 1*Power button (Lock screen; Fingerprint recognition optional)
Power Adapter Input: AC 100~240V/1.5A Output: DC 24V/1.5A/36W	External Memory 1*MicroSD (TF card) Up to 1TB supported	Ports 1*USB typeA 3.0 port 2*USB typeA 2.0 port 1*RJ11 serial port 1*RJ12 cash drawer port 1*RJ45 LAN port 1*audio jack 1*power port 1*USB typeC 2.0 port 1*MicroUSB debug port	Weight D3 PRO: 4.5kg 10.1" separate monitor: 0.88kg	Environment Operating tempera- ture: 0°C~40°C Storage temperature: -20°C ~ 60°C
Indicator Light Blue (Power)	Accessories 10.1" separate monitor, HD 1280*800, Capacitive multitouch display	Dimensions (L*W*H) 380mm*195mm*310mm		

1.All specifications are subject to change without (prior) notice.